

Velodyne LiDAR[®]

Puck[™]

REAL-TIME 3D LiDAR SENSOR



VLP-16



Velodyne LiDAR PUCK[™]

Velodyne's new Puck, VLP-16 sensor is the smallest, and most advanced product in Velodyne's 3D LiDAR product range. Vastly more cost-effective than similarly priced sensors, and developed with mass production in mind, it retains the key features of Velodyne's breakthroughs in LiDAR: Real-time, 360°, 3D distance and calibrated reflectivity measurements.

Real-Time 3D LiDAR


The VLP-16 has a range of 100 m, and the sensor's low power consumption (~8 W), light weight (830 g), compact footprint (~Ø103 mm x 72 mm), and dual return capability make it ideal not only for autonomous vehicles but also robotics and mobile terrestrial 3D mapping applications.

Velodyne's LiDAR Puck supports 16 channels, ~300,000 points/second, 360° horizontal field of view and a 30° vertical field of view, with ±15° up and down. The Velodyne LiDAR Puck does not have visible rotating parts, making it highly resilient in challenging environments (Rated IP67) while operating over a wide temperature range (-10°C to +60°C).




VLP-16

DIMENSIONS

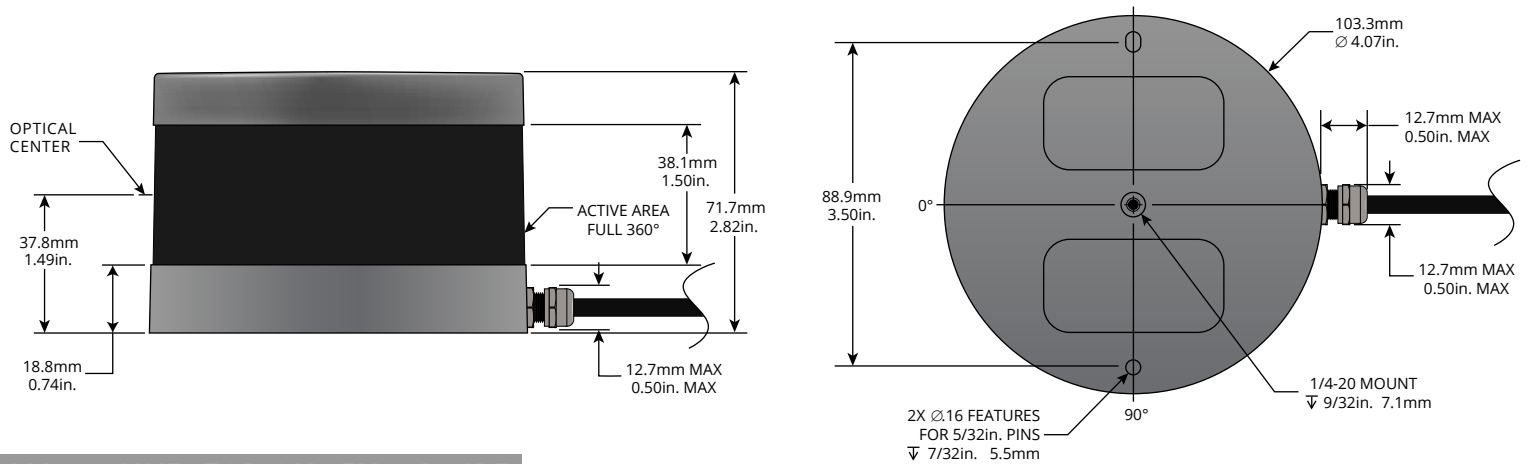

M12 CONNECTOR ON SENSOR SIDE

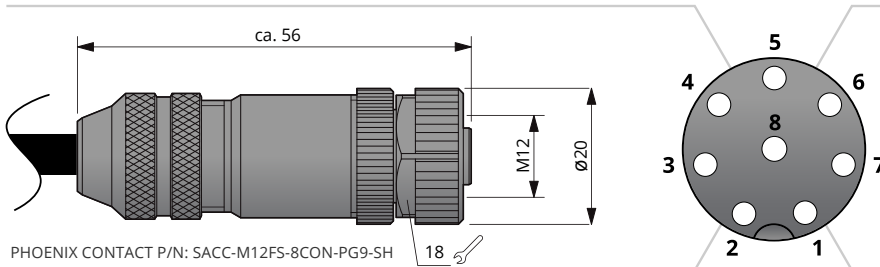

Pin	Wire Color	Function
8	Black	Ground
7	Red	+12 V
6	Yellow	GPS Pulse Per Second (PPS)
5	White	GPS Serial Data
4	Light Orange	Ethernet TX+
3	Orange	Ethernet TX-
2	Light Blue	Ethernet RX+
1	Blue	Ethernet RX-



Real-Time 3D LiDAR Sensor

The VLP-16 provides high definition 3-dimensional information about the surrounding environment.

Specifications:

Sensor:

- Time of Flight Distance Measurement with Calibrated Reflectivities
- 16 Channels
- Measurement Range: Up to 100 m
- Accuracy: ± 3 cm (Typical)
- Single and Dual Returns (Strongest, Last)
- Field of View (Vertical): $+15.0^\circ$ to -15.0° (30°)
- Angular Resolution (Vertical): 2.0°
- Field of View (Horizontal): 360°
- Angular Resolution (Horizontal/Azimuth): 0.1° – 0.4°
- Rotation Rate: 5 Hz – 20 Hz
- Integrated Web Server for Easy Monitoring and Configuration

Laser:

- Laser Product Classification: Class 1 Eye-safe per IEC 60825-1:2007 & 2014
- Wavelength: 903 nm
- Beam Size @ Screen: 12.7 mm (Horizontal) x 9.5 mm (Vertical)
- Beam Divergence Horizontal: 0.18° (3.0 mrad); Vertical: 0.07° (1.2 mrad)

Mechanical/ Electrical/ Operational

- Power Consumption: 8 W (Typical)
- Operating Voltage: 9 V – 18 V (with Interface Box and Regulated Power Supply)
- Weight: 830 g (without Cabling and Interface Box)
- Dimensions: 103 mm Diameter x 72 mm Height
- Shock: 500 m/s² Amplitude, 11 ms Duration
- Vibration: 5 Hz to 2,000 Hz, 3 G_{rms}
- Environmental Protection: IP67
- Operating Temperature: -10°C to $+60^\circ\text{C}$
- Storage Temperature: -40°C to $+105^\circ\text{C}$

Output:

- 3D LiDAR Data Points Generated:
 - Single Return Mode: ~300,000 points per second
 - Dual Return Mode: ~600,000 points per second
- 100 Mbps Ethernet Connection
- UDP Packets Contain:
 - Time of Flight Distance Measurement
 - Calibrated Reflectivity Measurement
 - Rotation Angles
 - Synchronized Time Stamps (μs resolution)
- GPS: \$GPRMC NMEA Sentence from GPS Receiver (GPS not included)

63-9229 Rev-F

Product Ordering Information:

Product Name	SKU Ordering Number	Sensor		Included	Interface Box		
		Connector	Cable Length*		Connector to Sensor	Cable Length*	I/O Connectors
Puck	80-VLP-16	None	3.0 m	Yes	None	-	RJ45, GPS and Power
Puck	80-VLP-16 M12-0.3M	M12 Female	0.3 m	Yes	M12 Male	1.6 m	RJ45, GPS and Power

*Cable Length includes the connector.



CLASS 1 LASER PRODUCT

Copyright ©2017 Velodyne LiDAR, Inc. Specifications are subject to change without notice. Other trademarks or registered trademarks are property of their respective owners.



14 Odem St. P.O.B. 7042 Petach Tikva 4917001, ISRAEL | Office: +972-3-924-3352
 Fax: +972-3-9243385 | sales@hypertech.co.il | www.hypertech.co.il