

The field-proven AHRS500CA is providing accurate and reliable attitude and heading information to instrument panels and autopilots in more than five hundred fixed-wing and rotary-wing aircraft.



Primary Flight Display Systems



Flight Test Instrumentation

This standalone AHRS solution is designed for avionics retrofit and OEM aircraft applications. The AHRS500CA is available in several different configurations that provide the flexibility to accommodate various system interfaces, and typical mounting orientation and installation location requirements.

Applications


- Primary Flight Display Systems
- Attitude Indicators
- Flight Test Instrumentation

Features

- Complete “Standalone” AHRS Solution
- Maintains High Stability during long “Orbiting” Maneuvers
- Low Power < 4W
- Comprehensive BIT (Built-in-Test)
- High Reliability MEMS Sensors
- Compatible with CRM-Series Remote Magnetometer (optional)

Certifications

- DO-178B Level C

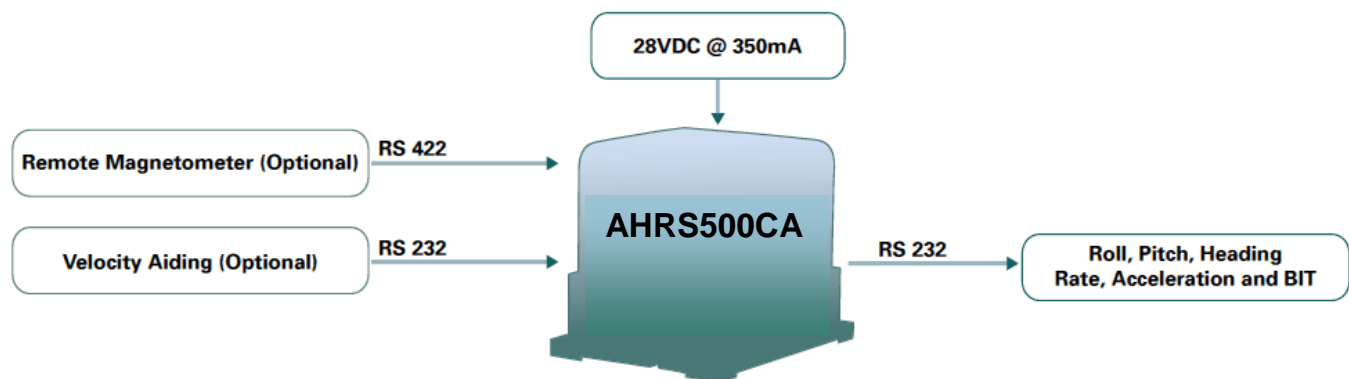

AHRS500

ATTITUDE & HEADING REFERENCE SYSTEM

Performance

AHRS500

Heading	
Range (°)	± 180
Accuracy ¹ (2σ)	± 2.0
Resolution (°)	0.1

Attitude	
Range: Roll, Pitch (°)	± 180, ± 90
Accuracy ¹ (2σ)	± 1.0
Resolution (°)	< 0.1

Angular Rate	
Range: Roll, Pitch, Yaw (°/sec)	± 200
Bias: Roll, Pitch, Yaw (°/sec)	< ± 0.1
Resolution (°/sec)	< 0.15
Bandwidth (Hz)	25

Acceleration	
Range: X/Y/Z (g)	± 10
Bias: X/Y/Z (mg)	< ± 15
Resolution (mg)	< 2.0
Bandwidth (Hz)	25

Specifications

Environment ²	
Operating Temperature (°C)	-40 to +70
Non-Operating Temperature (°C)	-55 to +85
Enclosure	Sealed Housing

Electrical	
Input Voltage (VDC)	12V or 24V Elec. System
Power Consumption (W)	< 4
Digital Interface	RS-232


Physical	
Size (in)	4.66 x 4.53 x 4.863
(cm)	11.84 x 11.51 x 12.35
Weight (lbs)	3.5
(kg)	1.6
Connector	DB15, D-sub 15-pin Male

Ordering Information

Model	Description
AHRS500CA-220	AHRS (install with connector aft, 100Hz update rate, 38400 baud rate)
AHRS500CA-221	AHRS (install with connector fwd, 100Hz update rate, 38400 baud rate)
AHRS500CA-224	AHRS (install with connector aft, 25Hz update rate, 9600 baud rate)
AHRS500CA-225	AHRS (install with connector fwd, 25Hz update rate, 9600 baud rate)
AHRS500CA-226	AHRS (install with connector aft, 100Hz update rate, 38400 baud rate)
AHRS500CA-227	AHRS (install with connector fwd, 100Hz update rate, 38400 baud rate)

This product has been developed exclusively for commercial applications. It has not been tested for, and makes no representation or warranty as to conformance with, any military specifications or its suitability for any military application or end-use. Additionally, any use of this product for nuclear, chemical or biological weapons, or weapons research, or for any use in missiles, rockets, and/or UAV's of 300km or greater range, or any other activity prohibited by the Export Administration Regulations, is expressly prohibited without the written consent and without obtaining appropriate US export license(s) when required by US law. Diversion contrary to U.S. law is prohibited. Specifications are subject to change without notice. Notes: ¹ During steady level flight. ² DO-160D Environmental Category: C4BBB[(SM)(U)]XWXXXXZBABCWMA3G33XAA

GYRO-VIEW 2.0 Configuration & Display Software

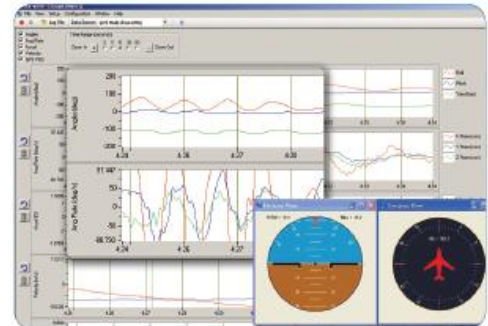

GYRO-VIEW 2.0 provides an easy to use graphical interface to display, record and analyze all of the AHRS500 measurement parameters.

Other Components

Each AHRS500CA is shipped with an interface cable (used during installation alignment), ACEINNA's 500 Series User's Manual and GYRO-VIEW 2.0 configuration and display software.

The AHRS500CA is designed for stand-alone operation, but may also be used with ACEINNA's CRM500 remote magnetometer for installations requiring a wing or tail mount magnetometer.