

Diode Probe cables

Types 3026_PCAB & 3026_PYC

The COMM-connect Diode Probe cables is used to connect COMM-connect Power Monitor products with their respective probes. Cables are screened for optimum signal transport. Two types are available, the 3026_PCAB for connecting one probe per probe port, and 3026_PYC for connecting two probes per probe port. Standard lengths are 2 meters per probe, however projects often have other requirements, so please contact COMM-connect in case you have special needs.

Single probe cable, Type 3026_PCAB:



Double probe cable, type 3026_PYC:




Single probe cable, Type 3026_PCAB, Specifications:

Monitor port connector:	9-pin SubD
Probe connector:	TNC Male
Length:	2000mm, ± 30mm
Cable type:	RG 58
Maximum nominal length:	3000mm


Double probe cable, Type 3026_PYC, Specifications:

Monitor port connector:	9-pin SubD
Probe connectors:	2 x TNC Male
Length:	2000mm, ± 30mm (each)
Cable type:	RG 58
Maximum nominal length:	3000mm

Single probe cable, Type 3026_PCAB:

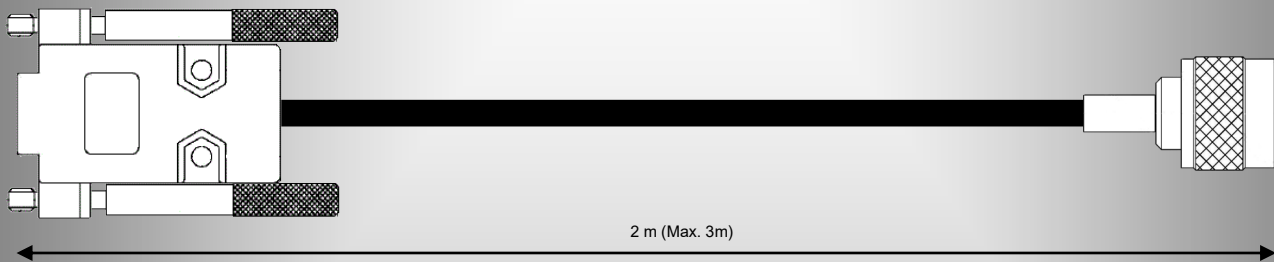

Double probe cable, type 3026_PYC:

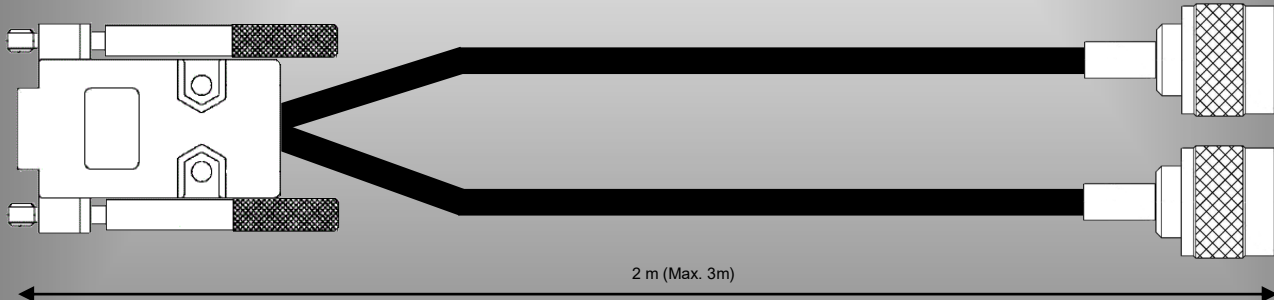

COMM-connect A/S reserves the right to change prices and specifications without prior notice

True RMS Probe cables

Types 301x_PCAB & 302x_PYC

The COMM-connect True RMS Probe cables is used to connect COMM-connect Power Monitor products with their respective probes. Cables are screened for optimum signal transport. Two types are available, the 301x_PCAB for connecting one probe per probe port, and 302x_PYC for connecting two probes per probe port. Standard lengths are 2 meters per probe, however projects often have other requirements, so please contact COMM-connect in case you have special needs.

Single probe cable, Type 301x_PCAB, Std. specifications:

Monitor port connector: 9-pin SubD
 Probe connector: Lemo FGG
 Length: 2000mm, ± 30mm
 Cable type: Screened
 Maximum nominal length: 20000mm

Double probe cable, Type 302x_PYC, Std. specifications:

Monitor port connector: 9-pin SubD
 Probe connectors: 2 x Lemo FGG
 Length: 2000mm, ± 30mm (each)
 Cable type: Screened
 Maximum nominal length: 20000mm

Single probe cable, Type 301x_PCAB:



Double probe cable, type 302x_PYC:




How to order:

Cable type	Length 1	Length 2
301x_PCAB	Pls. specify in meters*	N/A
302x_PYC	Pls. specify in meters*	Pls. specify in meters*


Example: Ordering code 302x_PYC_7_6 will be a Y-cable where the first cable is 7 meters long, and the second cable is 6 meters long.

*: If no length is specified, the cables will be manufactured according to the standard specifications

Single probe cable, Type 301x_PCAB:

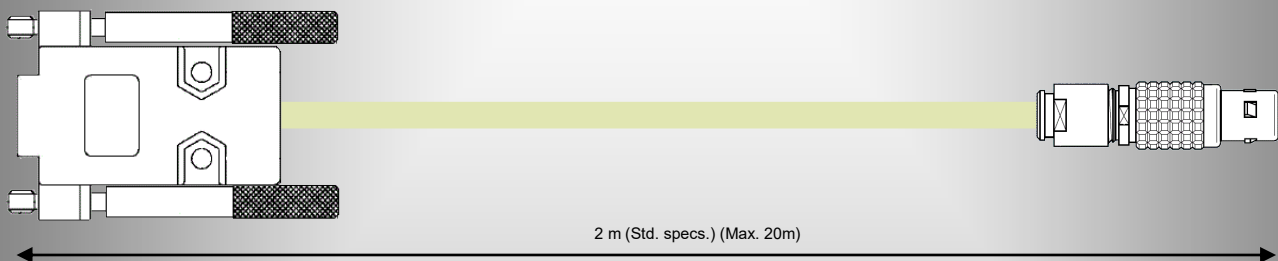

Double probe cable, type 302x_PYC:

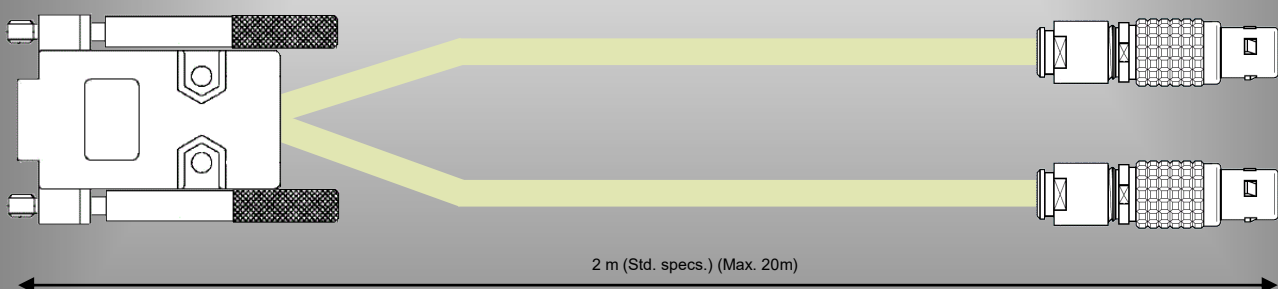

COMM-connect A/S reserves the right to change prices and specifications without prior notice