



Mini-T™ GG Multi-GNSS Disciplined Clock

Multi-GNSS Disciplined Clock

Protempis Mini-T™ GG is a multi-GNSS (GPS, GLONASS) Disciplined Clock, optimized to generate precise timing signal. Designed specifically for compact, high-volume applications. When operating in Over Determined Timing Mode the accuracy of pulse per second (PPS) is within 15 nanoseconds of GNSS/UTC.

Synchronization for Next Generation

The Mini-T™ GG gives OEMs the opportunity to embed a low-cost precise time and frequency reference, in our smallest form-factor yet.

Protempis created the Mini-T™ GG using clock technology proven in generations of deployed units used in 4G networks (LTE, WiMAX, HSPA+) and digital broadcasting applications. It utilizes the latest in GNSS technology, combined with a precision ovenized oscillator for near atomic clock precision timing.

Standard Timing Feature

Protempis Mini-T™ GG is a multi-GNSS (GPS, GLONASS) Disciplined Clock, optimized to generate precise timing signal. Designed specifically

for compact, high-volume applications. When operating in Over Determined Timing Mode the accuracy of pulse per second (PPS) is within 15 nanoseconds of GNSS/UTC.

Synchronization for Next Generation

The Mini-T™ GG includes many of Protempis's standard timing features, including the Disciplined Clock Autonomous Integrity Monitoring (T-RAIM) algorithm, and automatic self-survey. The Mini-T™ GG is factory default with the TSIP protocol that follows specific timing products and applications.

Proven Reliability

The Mini-T™ GG offers proven reliability and performance, will exceed your expectations, and enable you to provide your customers with the highest quality GNSS solution available today. The Mini-T™ GG GNSS Clock Board is offered with a standard 10 MHz output, but it is also available in custom frequencies.



Key Features

- Multi-Constellation
- Simultaneous GPS and GLONASS tracking
- Extended temperature range (-40°C / +85°C)
- Holdover stability of ±5us over 24 hour period @ 25°C
- Small foot print and low profile, suited for digital broadcast and small cells
- PPS and 10MHz output
- T-RAIM (Disciplined Clock Autonomous Integrity Monitoring) provides high PPS integrity



14 Odem ST, P.O.B. 7042 Petach Tikva 4917001, ISRAEL | Office: +972-3-924-3352
 Fax: +972-3-9243385 | sales@hypertech.co.il | www.hypertech.co.il



Disclaimer

Protempis does not assume any liability arising out of the application or use of any product described or shown herein nor does it convey any license under its patents, copyrights, or any rights of others. Licenses or any other rights such as, but not limited to, patents, utility models, trademarks or trade names, are neither granted nor conveyed by this document, nor does this document constitute any obligation of the disclosing party to grant or convey such rights to the receiving party.



General Specifications

Receiving Signal.....GPS L1 & GLONASS G1
 Positioning System.....SPS, Timing
 Acquisition Channels..... 24 Channels
 Tracking Channels..... 24 Channels
 1 PPS Timing Accuracy 15 ns (1 sigma)
 Holdover Stability.....$\pm 5\mu s$ over 24Hr period @ 25°C
 Horizontal Position Accuracy.....<math>< 6m</math> (50%), <math>< 9m</math> (90%)
 Vertical Position Accuracy.....<math>< 11m</math> (50%), <math>< 18m</math> (90%)
 Update Rate.....1 Hz
 Data Format.....TSIP or NMEA
 Typical Min Acq Sensitivity.....-150dBm cold start
 Typical Min Tracking Sensitivity-160dBm
 Time to First Fix.....<math>< 46s</math> (50%), <math>< 50s</math> (90%) cold start
 Typical Time to Re-acquisition.....<math>< 2s</math> (90%)

Interface Characteristics

Serial Port.....1 serial port
 PPS / Even Second.....CMOS-compatible
 TTL-level pulse, once per second
 Protocols.....TSIP, NMEA 0183
 GNSS Input Connector.....SMA
 PPS Out.....SMA
 Frequency Out.....SMA
 I/O Connector.....2x15 Pin

Oscillator Specifications

Frequency Output.....10MHz
 Phase Noise.....-90dBc/Hz @ 1Hz
 -120dBc/Hz @ 10Hz
 -135dBc/Hz @ 100Hz
 -145dBc/Hz @ >1KHz


Electrical Characteristics

Supply Voltage Range.....5.5V DC $\pm 5\%$

Environmental Characteristics

Operating Temperature.....-40°C to +85°C
 Vibration 0 008 g2/Hz.....5 Hz to 20 Hz
 0 05 g2/Hz.....20 Hz to 100 Hz
 -3 dB/octave.....100 Hz to 900 Hz
 Operating Humidity.....5%-95%
 RH non-condensing (+60°C)

Mechanical Drawing

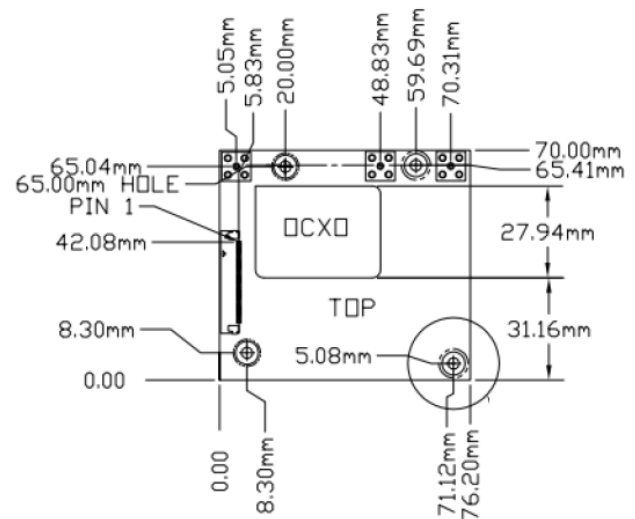

General Information

Bullet GG, 5V DC with 32 dB gain



14 Odem ST. P.O.B. 7042 Petach Tikva 4917001, ISRAEL | Office: +972-3-924-3352
 Fax: +972-3-9243385 | sales@hypertech.co.il | www.hypertech.co.il



Disclaimer

Protempis does not assume any liability arising out of the application or use of any product described or shown herein nor does it convey any license under its patents, copyrights, or any rights of others. Licenses or any other rights such as, but not limited to, patents, utility models, trademarks or trade names, are neither granted nor conveyed by this document, nor does this document constitute any obligation of the disclosing party to grant or convey such rights to the receiving party.