



ZETA-NLP-LTEM (EU)

4G / LTE Category M / NB IoT Industrial Modem

General Description




The ZETA-NLP-LTEM (EU) is a cutting edge, extremely low power industrial modem. It will connect equipment to the new LTE Cat M and NB IoT networks as they become available also providing connectivity to the existing 2G / GSM cellular network. The modem is able to operate in an extremely low power state which makes it ideal for use in industrial IoT applications today and for long term future developments.

The unique feature of the ZETA-NLP-LTEM (EU) allows it to run in an ultra low power state due to its intelligent power saving design. Additionally the range offers interface options including legacy RS232 for connection to existing equipment and a high speed USB interface.


The powerful C development environment reduces redundancy and lowers system component costs, allowing developers to maximise the power of their application directly on the device and eliminating the requirement for an external microcontroller. As a result the ZETA-NLP-LTEM (EU) lends itself to rapid proof-of-concept developments with minimal investment, providing fast time to market and maximum scalability.

Features

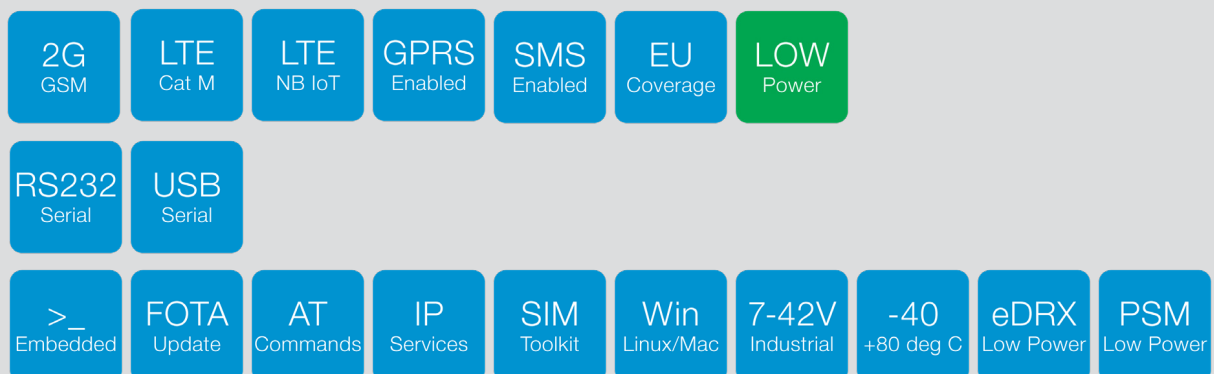

Featured Applications

- » Access Control Systems
- » Car Parking Payment
- » Environmental Monitoring
- » Vending Machines
- » Agriculture
- » Tank Monitoring
- » Alarm Panels
- » Industrial Sensors
- » Automatic Meter Reading
- » Utilities

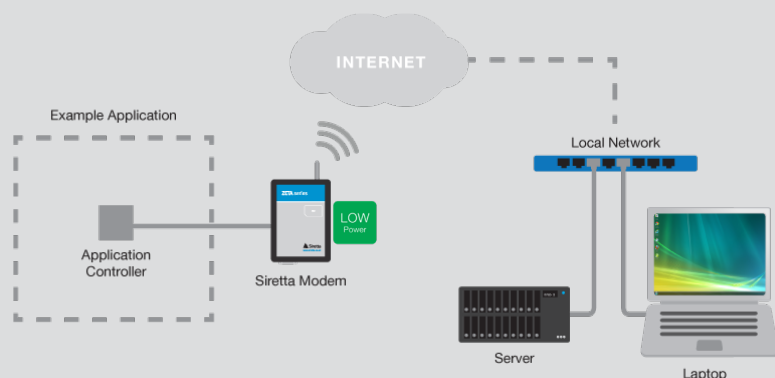



ZETA-NLP-LTEM (EU) 4G / LTE Category M / NB IoT Industrial Modem

General Features

- » 3 Bands LTE:
B3(1800), B8(900), B20(800)
- » 4 Bands GSM | GPRS:
B2(1900), B3(1800), B5(850), B8(900)
- » LTE UE Category M1/NB1
- » 3GPP release 13 compliant
- » Half Duplex FDD
- » 3GPP Rel. 12 Power Saving Mode (PSM)
- » 3GPP Rel. 13 Discontinuous Reception (eDRX)
- » 3GPP Rel. 13 Extended coverage
- » SMS and PDU message modes
- » SIM Application Tool Kit 3GPP TS 51.01
- » Control via AT commands according to 3GPP T S27.005, 27.007 and customized AT commands
- » IPv4/IPv6 stack with TCP and UDP protocol
- » OMA Lightweight M2M (LWM2M)

Interfaces

- » 1 x RS232 serial port interface (9-wire)
- » 1 x USB 2.0 FS
- » 1 x RJ12 power connection (7 - 42V)
Nominal supply 12V
Power on & power off control
- » 1 x SMA female cellular antenna connector
- » 1 x SIM card reader (push-push) 3V, 1.8V
- » 3 x external LED status indicators (Blue, Red, Green)

Environmental

- » Dimensions: 93mm x 67mm x 28mm
- » Weight: 90 grams
- » Extended Temperature Range: -40 to +85 deg C

Data

- » LTE Category M1
Uplink up to 375 kbps
Downlink up to 300 kbps
- » LTE Category NB1
Uplink up to 62.5 kbps
Downlink up to 21 kbps
- » EGPRS
Uplink up to 236 kbps
Downlink up to 296kbps

Approvals and Compliance

- » CE

Sensitivity

Output power

- » All Bands: (LTE) CAT-M1:
Class 3 23dBm (+-2dB)
- » All Bands: (LTE) CAT-NB1:
Class 3 23dBm (+-2 dB)
- » Bands: GSM850, GSM900: GPRS (GMSK):
Class 4 33dBm (+-2 dB)
- » Bands: GSM850, GSM900: EDGE (8PSK):
Class E2 27dBm (+-2 dB)
- » Bands: DCS1800, PCS1900: GPRS (GMSK):
Class 4 30dBm (+-2 dB)
- » Bands: DCS1800, PCS1900: EDGE (8PSK):
Class E2 26dBm (+-2 dB)

Application Resources and Drivers

AppZone C

- » Programming language: C
- » IDE: Eclipse
- » Dedicated File System: 5MB
- » Separate App. RAM Space: 2MB

USB Drivers

- » Windows 7/8/10 driver support
- » Linux native support (CDC ACM)